

EA

Applied COMFORT



FITS **16 3/8" x 44 7/8"** WALL SLEEVE

REPLACEMENT FOR:
EA, ES (McQuay, Singer, Remington)
PMES, PMEG, PDAE (McQuay)
ED (Islandaire)

Premium, . . . meet Affordable!

ENERGY EFFICIENT -- 12 & 15KBU qualified for new construction! Performance verified by 3rd party laboratory.


VERY QUIET -- Acoustic noise cancelling materials and optimized fan designs for **unmatched comfort**.

HIGH PERFORMANCE -- Superior high static pressure blower designs. Premium UL category 1 components for unmatched **reliability and durability**.

EASY INSTALLATION -- EXACT replacement, no sleeve or louver modifications -- works with EA front panel.

MODERN ELECTRONIC CONTROL -- Optional Electronic Touchpad controls switchable to 24v remote wall thermostat and EMS connection.

*New high performance design for 2012!
 energy efficient! quiet! durable!*

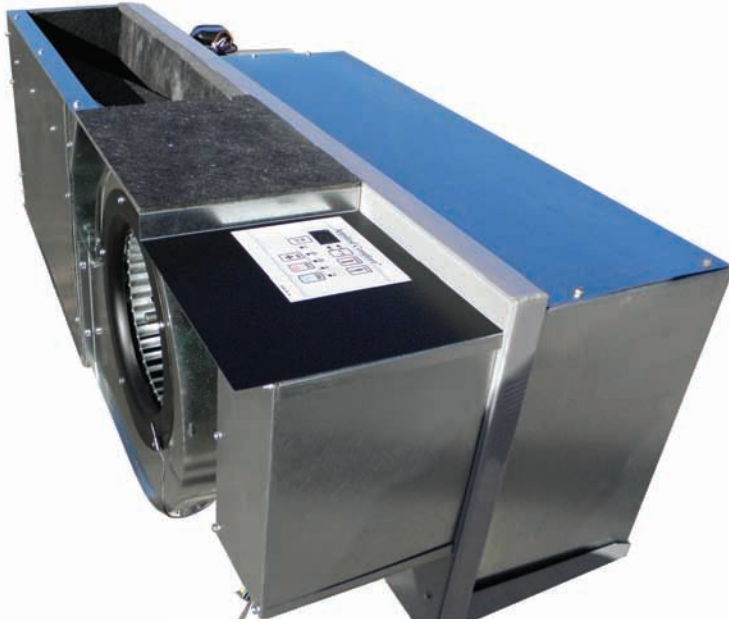

Electronic



Mechanical




VERIFIED FOR ENERGY PERFORMANCE

Accessories:

ACCEAFTCOVER_PREMIUM	Premium Room Front Cover -- Double panel Insulated -- 4-sided Air Return -- washable aluminum filter sold separately
ACCEAFTCOVER_SIMPLE	Simple Room Front Cover -- Single panel Insulated -- Front grille Air Return -- washable aluminum filter sold separately
ACCEARSRETROFIT_PREMIUM	Complete Heatpump Retrofit Kit -- for installing EA chassis into ES/RS/MQT wall sleeve -- includes ACCEAFTCOVER_PREMIUM, ACCEAFILTER, bottom blankout kit, fasteners.
ACCEARSRETROFIT_SIMPLE	Complete Heatpump Retrofit Kit -- for installing EA chassis into ES/RS/MQT wall sleeve -- includes ACCEAFTCOVER_PREMIUM, ACCEAFILTER, bottom blankout kit, fasteners.
ACCEAWALLSLEEVE	Wall Sleeve -- 44 7/8" wide x 16 3/8" high x 20" deep. Also is exact replacement for existing McQuay EA sleeves -- includes Top Louver & Control Door (ACCEATOPLOUVER). Note: Filter, and Front Covers are sold separately.
ACCEAFILTER	Aluminum Mesh Filter -- fits into ACCEAFTCOVER_PREMIUM and ACCEAFTCOVER_SIMPLE
ACCEATOPLOUVER	Top Louver and Control Access Door for ACCEAWALLSLEEVE. Also is replacement for McQuay EA/RS/MQT sleeve louvers/doors.
ACCEAAAGRILLE_ANODIZED	Aluminum Architectural Grille -- Anodized Silver
ACCEASSGRILLE_BEIGE	Stamped Steel Powder-Coated Grille -- Beige
ACCEASSGRILLE_SILVER	Stamped Steel Powder-Coated Grille -- Silver
ACCEASUBBASE_NOPOWER	Sub Base -- Powder-Coated Black -- No Power

Premium

Affordable

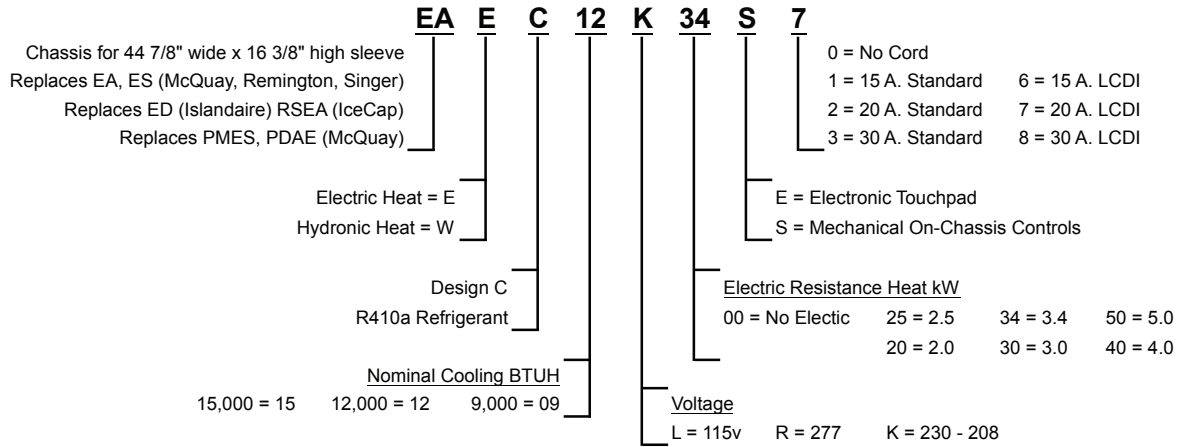

EAEC Air Conditioner with Electric Resistance Heat

Model	Voltage	Hz	Cooling					Resistance Heat			Min. Circuit Amps	MOP* Fuse Amps	Electrical Plug (NEMA)	Indoor CFM HIGH°	Indoor CFM LOW°	Net Wt. lbs.	Ship Wt. lbs.
			BTU/Hr.	EER	Amps	S/T	Pts./hr.	BTU/Hr.	kW	Amps							
EAEC09L00	115	60	9300	10.1	7.5	75	2.0	N/A	N/A	N/A	15.6	20	#5-20P	300	240	134	152
EAEC12L00	"	"	12500	10.1	10.8	71	3.2	N/A	N/A	N/A	19.4	20	#5-20P	330	250	"	"
EAEC09K00	230 - 208	"	9300	10.1	4.2	75	2.0	N/A	N/A	N/A	7.3	15	#6-15P	300	240	"	"
EAEC09K25	"	"	"	"	"	"	"	8900/7500	2.5/2.1	11.6/10.5	14.3	15	"	"	"	"	"
EAEC09K34	"	"	"	"	"	"	"	12000/9300	3.4/2.8	15.5/14.1	19.1	20	#6-20P	"	"	"	"
EAEC09K50	"	"	"	"	"	"	"	17500/13300	5.0/4.1	22.5/20.4	27.8	30	#6-30P	"	"	"	"
EAEC12K00	"	"	12500	10.1	5.9	71	3.2	N/A	N/A	N/A	9.5	15	#6-15P	330	250	"	"
EAEC12K25	"	"	"	"	"	"	"	8900/7500	2.5/2.1	11.6/10.5	14.3	15	"	"	"	"	"
EAEC12K34	"	"	"	"	"	"	"	12000/9300	3.4/2.8	15.5/14.1	19.1	20	#6-20P	"	"	"	"
EAEC12K50	"	"	"	"	"	"	"	17500/13300	5.0/4.1	22.5/20.4	27.8	30	#6-30P	"	"	"	"
EAEC15K00	"	"	15000	9.7	7.5	65	4.8	N/A	N/A	N/A	11.6	15	#6-15P	"	"	"	"
EAEC15K25	"	"	"	"	"	"	"	8900/7500	2.5/2.1	11.6/10.5	14.3	15	"	"	"	"	"
EAEC15K34	"	"	"	"	"	"	"	12000/9300	3.4/2.8	15.5/14.1	19.1	20	#6-20P	"	"	"	"
EAEC15K50	"	"	"	"	"	"	"	17500/13300	5.0/4.1	22.5/20.4	27.8	30	#6-30P	"	"	"	"
EAEC09R00	277	"	9300	10.1	3.2	75	2.0	N/A	N/A	N/A	7	15	#7-20P	300	240	"	"
EAEC09R20	"	"	"	"	"	"	"	7200	2.0	8.0	10	15	"	"	"	"	"
EAEC09R30	"	"	"	"	"	"	"	10600	3.0	11.6	14.8	15	"	"	"	"	"
EAEC09R40	"	"	"	"	"	"	"	14000	4.0	15.2	19.4	20	"	"	"	"	"
EAEC12R00	"	"	12700	10.1	5	71	3.2	N/A	N/A	N/A	8.2	15	"	330	250	"	"
EAEC12R20	"	"	"	"	"	"	"	7200	2.0	8.0	10	15	"	"	"	"	"
EAEC12R30	"	"	"	"	"	"	"	10600	3.0	11.6	14.8	15	"	"	"	"	"
EAEC12R40	"	"	"	"	"	"	"	1400	4.0	15.2	19.4	20	"	"	"	"	"
EAEC15R00	"	"	15300	9.7	6.3	65	4.8	N/A	N/A	N/A	10.1	15	"	"	"	"	"
EAEC15R20	"	"	"	"	"	"	"	7200	2.0	8.0	10	15	"	"	"	"	"
EAEC15R30	"	"	"	"	"	"	"	10600	3.0	11.6	14.8	15	"	"	"	"	"
EAEC15R40	"	"	"	"	"	"	"	14000	4.0	15.2	19.4	20	"	"	"	"	"

*Time Delay Fuse or HCAR Circuit Breaker ---- °Dry Coil ----- 277v models have non-LCDI cords.

EAWC Air Conditioner with Hydronic Heat

Model	Voltage	Hz	Cooling					Resistance Heat			Min. Circuit Amps	MOP* Fuse Amps	Electrical Plug (NEMA)	Indoor CFM HIGH°	Indoor CFM LOW°	Net Wt. lbs.	Ship Wt. lbs.
			BTU/Hr.	EER	Amps	S/T	Pts./hr.	BTU/Hr.	kW	Amps							
EAWC09L00	115	60	9300	10.1	4.5	75	2.0	N/A	N/A	N/A	15.6	20	#5-15P	300	240	134	152
EAWC12L00	"	"	13200	10.1	11.6	"	"	N/A	N/A	N/A	19.4	20	#5-20P	330	250	"	"
EAWC09K00	230 - 208	"	9300	10.1	4.5	71	3.2	N/A	N/A	N/A	7.3	15	#6-15P	300	240	"	"
EAWC12K00	"	"	12700	10.1	5.8	"	"	N/A	N/A	N/A	9.5	15	#6-15P	330	250	"	"
EAWC15K00	"	"	15300	9.7	7.3	"	"	N/A	N/A	N/A	11.6	15	#6-15P	"	"	"	"
EAWC09R00	277	"	9300	10.1	3.9	65	4.8	N/A	N/A	N/A	7	15	#7-20P	300	240	"	"
EAWC12R00	"	"	12700	10.1	5	"	"	N/A	N/A	N/A	8.2	15	#7-20P	330	250	"	"
EAWC15R00	"	"	15300	9.7	6.3	"	"	N/A	N/A	N/A	10.1	15	#7-20P	"	"	"	"

*Time Delay Fuse or HCAR Circuit Breaker ---- °Dry Coil ----- 277v models have non-LCDI cords.

Specifications Subject to Change Without Notice

All brands and product names are trademarks or registered trademarks of their respective owners.

